

UNCLASSIFIED

---

AD 262 720

*Reproduced  
by the*

ARMED SERVICES TECHNICAL INFORMATION AGENCY  
ARLINGTON HALL STATION  
ARLINGTON 12, VIRGINIA




---

UNCLASSIFIED

NOTICE: When government or other drawings, specifications or other data are used for any purpose other than in connection with a definitely related government procurement operation, the U. S. Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto.

NOLTR 61-24

CHARACTERIZATION OF SQUIB MK 1 MOD 0:  
5-Megacycle RF Sensitivity for Long Duration Pulses

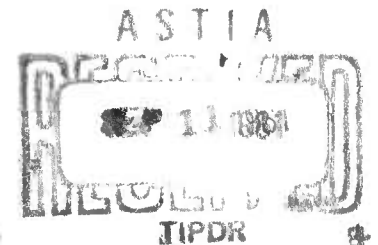

24 APRIL 1961

NOL

UNITED STATES NAVAL ORDNANCE LABORATORY, WHITE OAK, MARYLAND

- RELEASED TO ASTIA  
BY THE NAVAL ORDNANCE LABORATORY
- ☒ Without restrictions
  - ☐ For Release to Military and Government Agencies Only.
  - ☐ Approval by BuWeps required for release to contractors.
  - ☐ Approval by BuWeps required for all subsequent release.

XEROX

NOLTR 61-24

ASTIA  
AS 40  
262720

CHARACTERIZATION OF SQUIB MK 1 MOD 0:  
5-Megacycle RF Sensitivity for Long Duration Pulses

Prepared by:  
C. Goode and I. Kabik

Approved by: I. Kabik (acting)  
Chief, Explosion Dynamics Division

ABSTRACT: The response of the Squib Mk 1 Mod 0 to 5-Megacycle constant current (RMS) has been extended to long input times where the current amplitude for firing reaches a minimum asymptotic value. For a current amplitude of 374 milliamperes a pulse width of 155 milliseconds was found necessary to obtain 50-percent fires. When the current was allowed to flow for approximately 10 seconds (essentially steady state) a lower firing level of 308 milliamperes for 50-percent response was determined. These values are consistent with previous data obtained at 5 megacycles for shorter pulse times and also with DC constant current firing data.

PUBLISHED JUNE 1961

Explosions Research Department  
U. S. NAVAL ORDNANCE LABORATORY  
WHITE OAK, MARYLAND

NOLTR 61-24

24 April 1961

The work reported on here has been carried out as part of the Naval Ordnance Laboratory's participation in the HERO (Hazards of Electromagnetic Radiation to Ordnance) program supported by Tasks 506-925/56015/07040, 506-924/56035/01073, and NOL-443. The objective of the HERO effort at NOL is generally to characterize the response of electro-explosive devices to electric and electro-magnetic energies. This report describes the results of tests to determine the response of the Squib Mk 1 Mod 0 to small amplitude, long time, constant-current (RMS) 5-megacycle pulses.

This work should be of interest not only to the HERO project but also the broad field of electro-explosive device design, development, manufacture, and use.

W. D. COLEMAN  
Captain, USN  
Commander

*C. J. Aronson*  
C. J. ARONSON  
by direction

## CONTENTS

	Page
Introduction . . . . .	1
The Experimental Measurements . . . . .	1
The Apparatus . . . . .	1
The Experimental Procedure . . . . .	2
Results and Conclusions . . . . .	3

## ILLUSTRATIONS

Figure 1	Comparison of DC and 5-Megacycle Constant-Current Firing Results . . . . .	5
Figure 2	Schematic of Firing Apparatus . . . . .	6
Figure 3	Response of Squib Mk 1 Mod 0 to Constant-Current (RMS) 5-Megacycle Pulses. Time of pulse is 10 seconds. . .	7
Figure 4	Response of Squib Mk 1 Mod 0 to Constant-Current (RMS) 5-Megacycle Pulses. Current amplitude is 374 milliamperes. 8	
Figure 5	Response of Squib Mk 1 Mod 0 to Constant-Current (RMS) 5-Megacycle Pulses. . . . .	9

**CHARACTERIZATION OF SQUIB MK 1 MOD 0:  
5-Megacycle RF Sensitivity for Long Duration Pulses**

**INTRODUCTION**

As part of its task on the Hazards of Electromagnetic Radiation to Ordnance (HERO) program, the Naval Ordnance Laboratory is determining the response of the Mk 1 Mod 0 Squib to various electrical stimuli. One input stimulus under investigation has been 5-megacycle constant-current (RMS) pulses. The response of the squib to pulses at this frequency, compared to its response at DC, is of interest in assessing and predicting hazards from communication equipment.

Measurement of the response of the Mk 1 Squib to 5-megacycle stimuli has already been carried out and reported <sup>(1)</sup> by this Laboratory for current levels of approximately 1, 2, 3, and 4 amperes. Data for lower amplitude currents at 5 megacycles have not been obtained. It is a common observation that there exists for each particular EED a lower firing current level below which the EED will not fire. This is an important parameter in characterizing the EED with respect to the safety in handling it. This report describes the work carried out to obtain the response of the Mk 1 Squib at lower amplitudes in order to better define its minimum firing current level and to further establish the overall shape of the firing current-pulse width relationship. The conclusion previously drawn--that there is no significant difference between the response of the Mk 1 Squib to DC stimuli and to 5-megacycle constant-current (RMS) stimuli--is still valid for the low-amplitude long-duration pulses.

**THE EXPERIMENTAL MEASUREMENTS**

The Apparatus. The 5-megacycle constant-current firing data previously obtained and reported are summarized by Figure 1, and are shown to serve as proper background for the additional data to be presented in this report. It can be seen from Figure 1 that the previous data did not establish the lower firing level, i.e., small amplitude large time inputs for the 5-megacycle frequency. The apparatus previously used, except for the standard resistor, could not be used for the present work because the pulse time could not be extended beyond approximately 1 millisecond. Consequently, different instrumentation had to be developed for the experiments of the present work. However, the standard resistor, which was previously assembled and calibrated with much care, was also used in these present experiments.

---

(1) NavWeps Report 7309, "Characterization of Squib Mk 1 Mod 0: 5-Megacycle RF Burst Sensitivity", 16 December 1960, L. Green and C. Goode.

It was desired to establish two additional data points for the 5-megacycle constant-current (RMS) -- pulse width relationship. One point was desired at the lowest firing level (minimum current possible for infinitely long input times); the other point was desired between the lowest point established in reference 1 (1 ampere) and this minimum firing level.

The apparatus assembled consisted basically of a 5-megacycle unit oscillator,\* a power supply for the oscillator, and a coaxial safety switch to isolate the firing pulse from the squib in the firing chamber until it was desired to deliver the firing pulse. In establishing the lower firing level, the apparatus was operated at CW. For the "in-between" point the apparatus was modified to contain an RC pulse forming network to allow variation of the pulse width as desired. Figure 2 shows a block diagram of the apparatus used including the two oscilloscopes which monitored the pulse amplitude and/or pulse width. The basic monitoring was performed by observing the potential drop across the standard resistor in series with the squib to be fired. The firing was at constant current because the input impedance of the oscillator was high (50 ohms) compared to the squib impedance. Variations in squib impedance during the firing cycle (changes of about 30 to 40 percent of the average 1-ohm bridge resistance) were negligible in comparison to the 50 ohms which acted as a current limiting ballast in the circuit.

The basic monitoring was necessary to obtain accurately the amplitude of the current, and, for the "in-between" point, the pulse width. The current amplitude during each firing was set approximately by eye by adjusting the potential drop across the standard resistor. The final current amplitude, however, was taken by reading with a comparator the photograph of the CRO trace.

Monitoring of the potential drop across the squib was also performed in case it was desired to calculate the change in squib impedance and the energy delivered to the squib during the firing pulse.

The Experimental Procedure. The data for both points were obtained by the Bruceton stair-step procedure (2). For the minimum current point the "on-time" of each pulse was held constant at 10 seconds and the current level was adjusted in accordance with the Bruceton plan using arithmetic current steps. Squibs which did not fire in the 10 seconds were taken to be at

---

\*A General Radio Model 1211B or equivalent.

(2) AMP Report 101.1R SRG-P No. 40, Statistical Analysis for a New Procedure in Sensitivity Experiments, July 1944. See also W. J. Dixon and F. J. Massey, "Introduction to Statistical Analysis" (McGraw Hill Book Co., Inc., New York, 1957).



equilibrium temperature-wise and therefore considered to be "no-fires".\* It was attempted to set the current steps 25 milliamperes apart. As explained previously, the levels were set as best possible by eye using the potential drop across the standard resistor. Later, from the photographic records the actual setting was read by use of a comparator. The comparator readings for each step (level) were then averaged to obtain the best estimate of the numeric value of the level to be used in the analysis of the results. This produced a non-uniform step size and, although the mean firing level computed is accurate, the standard deviation should not be used to compute any other percent firing point.

The data point between the lowest level of reference 1 and the minimum firing current was obtained using a variable pulse width Bruceton test plan. The current was set constant by eye at approximately 0.375 amperes. The monitor was again used to obtain the best average of the constant-current settings. This average turned out to be 0.374 amperes. The pulse width, as previously explained, was varied by the pulse forming network.

#### RESULTS AND CONCLUSIONS

The data obtained in the fixed pulse length—variable current test (minimum firing level) are shown in Figure 3. The average minimum firing current (50-percent fires) was determined to be 0.308 milliamperes. This value compares well with the DC minimum firing current of 0.3 milliamperes. (3) Because the Mk 1 Squib does not have a normal distribution of response to energizing stimuli (4) and because of the modification needed to analyze the experimental data indicated above, no attempt is made to prescribe a no-fire level for 5-megacycle energy sources.

The data obtained in the fixed current-variable pulse width test are shown in Figure 4. The mean average pulse width was determined to be 155 milliseconds for the 0.374-ampere fixed current level.

---

\*This is not unreasonable since the Mk 1 Squib has a thermal time constant of approximately 4 milliseconds. A time of 10 seconds is thus equivalent to 2500 time constants.

(3) "Cartridge Actuated Device Igniter Handbook", Atlantic Research Corp., 18 June 1958, (prepared under contract NOrd 17497)

(4) NavWeps Report 7347, "Characterization of the Squib Mk 1 Mod 0: Determination of the Statistical Model", L. D. Hampton and J. W. Ayres, 30 January 1961.

The two points determined are plotted in Figure 5 and are consistent with the data of reference 1. They show that there is no significant difference in the response of the Mk 1 Squib to constant current supplied at DC or 5 megacycle (RMS).

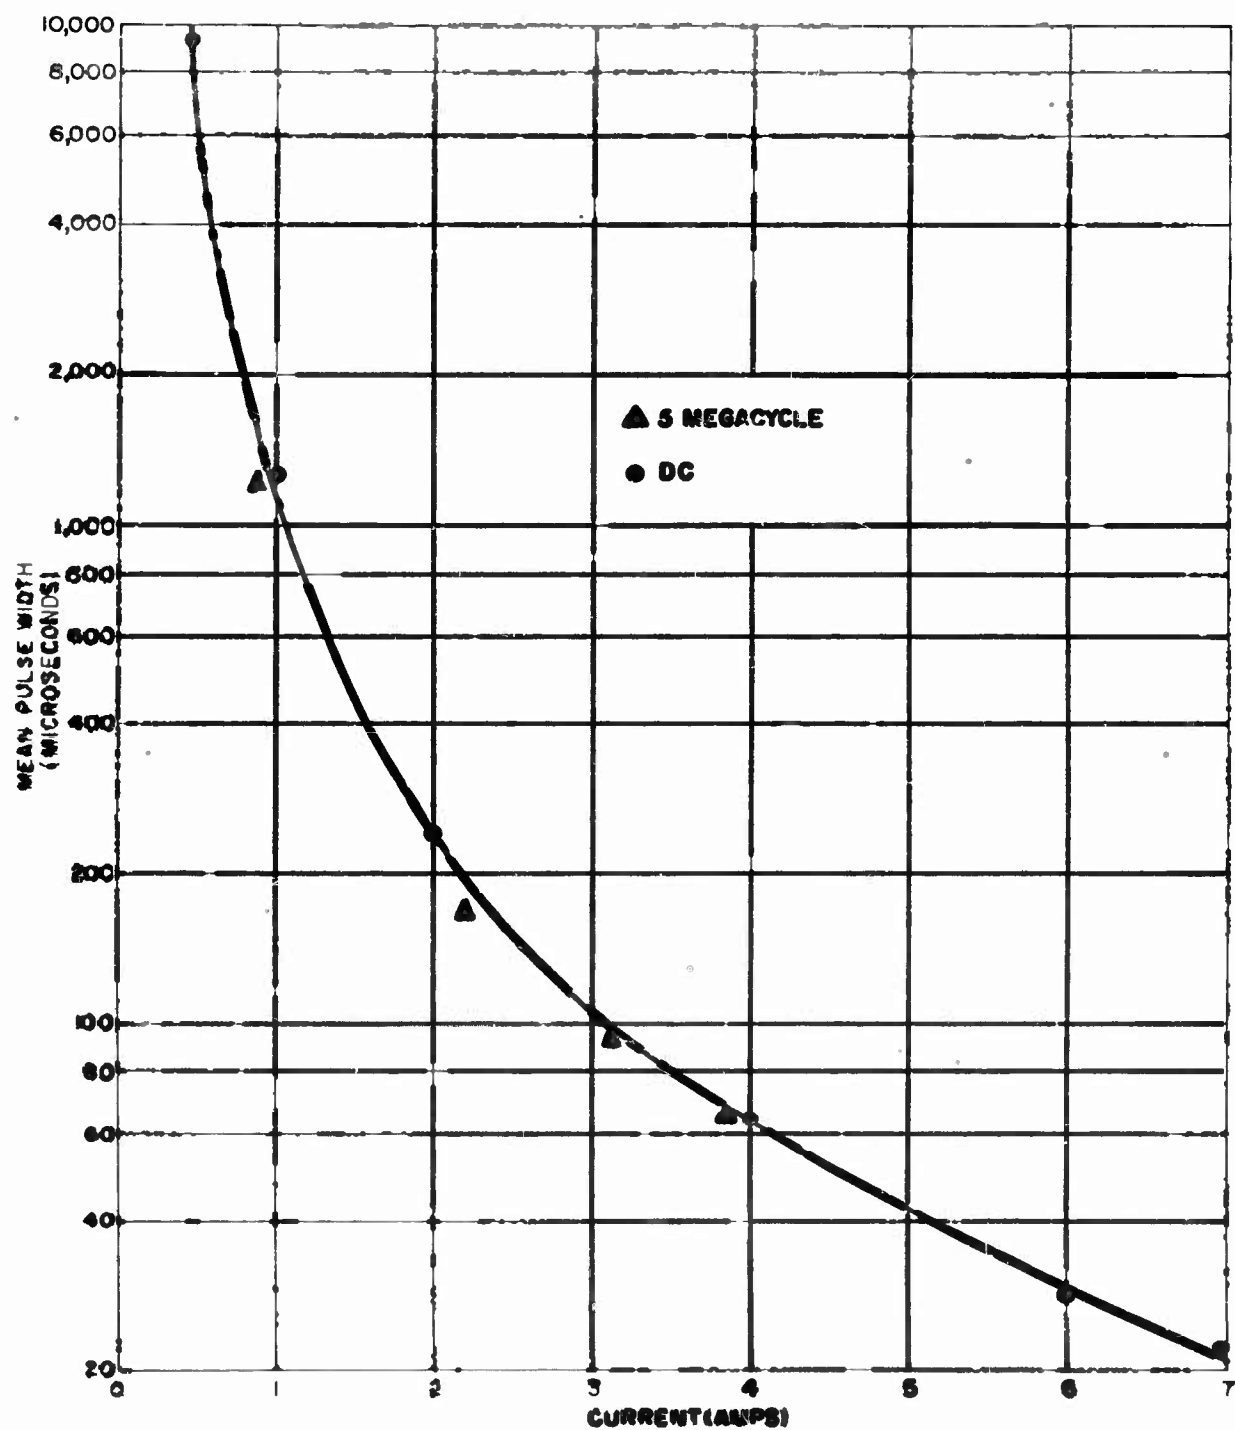


FIG.1 COMPARISON OF DC AND 5-MEGACYCLE CONSTANT-CURRENT FIRING RESULTS

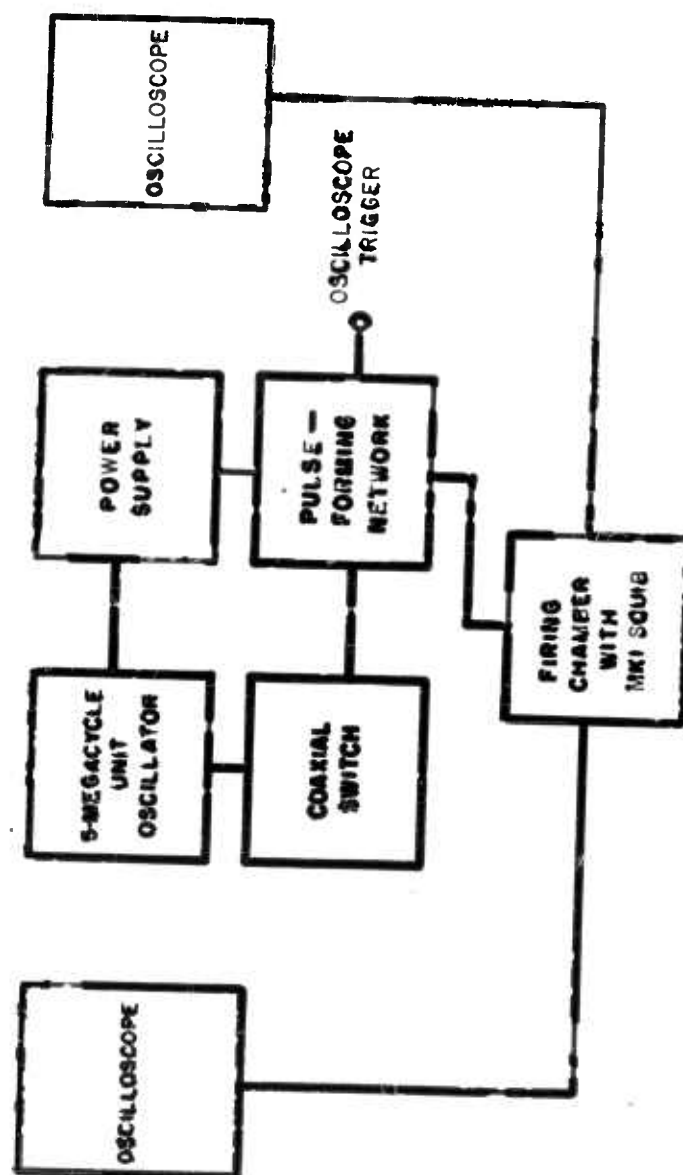


FIG. 2 SCHEMATIC OF FIRING APPARATUS


CURRENT (MILLIAMPS)	RESPONSE : O = FAILURE X = FIRE																			
350																				
332																				
308																				
279																				

INPUT TIME CONSTANT AT 10 SECONDS. CURRENT AMPLITUDE VARIABLE.

BY BRUCETON ANALYSIS

MEAN CURRENT (50 % FIRE) = 308 MILLIAMPS

FIG. 3 RESPONSE OF SQUIB MKI MOD 0 TO CONSTANT-CURRENT (RMS) 5-MEGACYCLE PULSE. TIME OF PULSE IS 10 SECONDS.

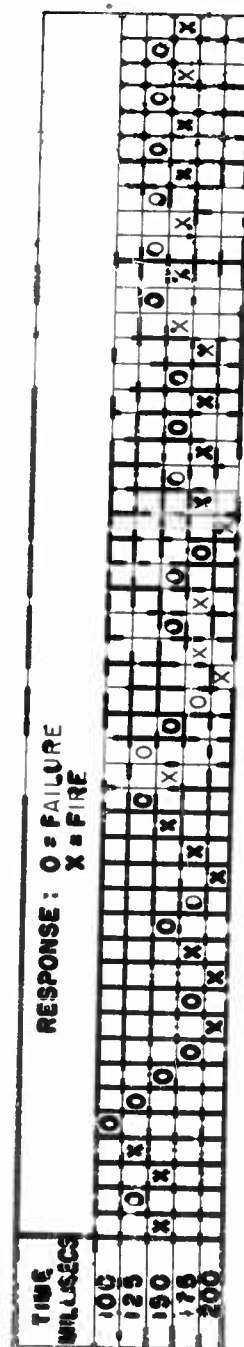

CONSTANT (5 MEGACYCLE/SEC) CURRENT OF 374 MILLIAMPS. TIME VARIABLE.

BY BRUCETON ANALYSIS

MEAN TIME (50% FIRES) = 158.2 MILLISECS.

FIG. 4 RESPONSE OF SQUIB MKI MOD O TO CONSTANT-CURRENT  
(RMS) 5-MEGACYCLES PULSE. CURRENT AMPLITUDE IS 374 MILLIAMPS.

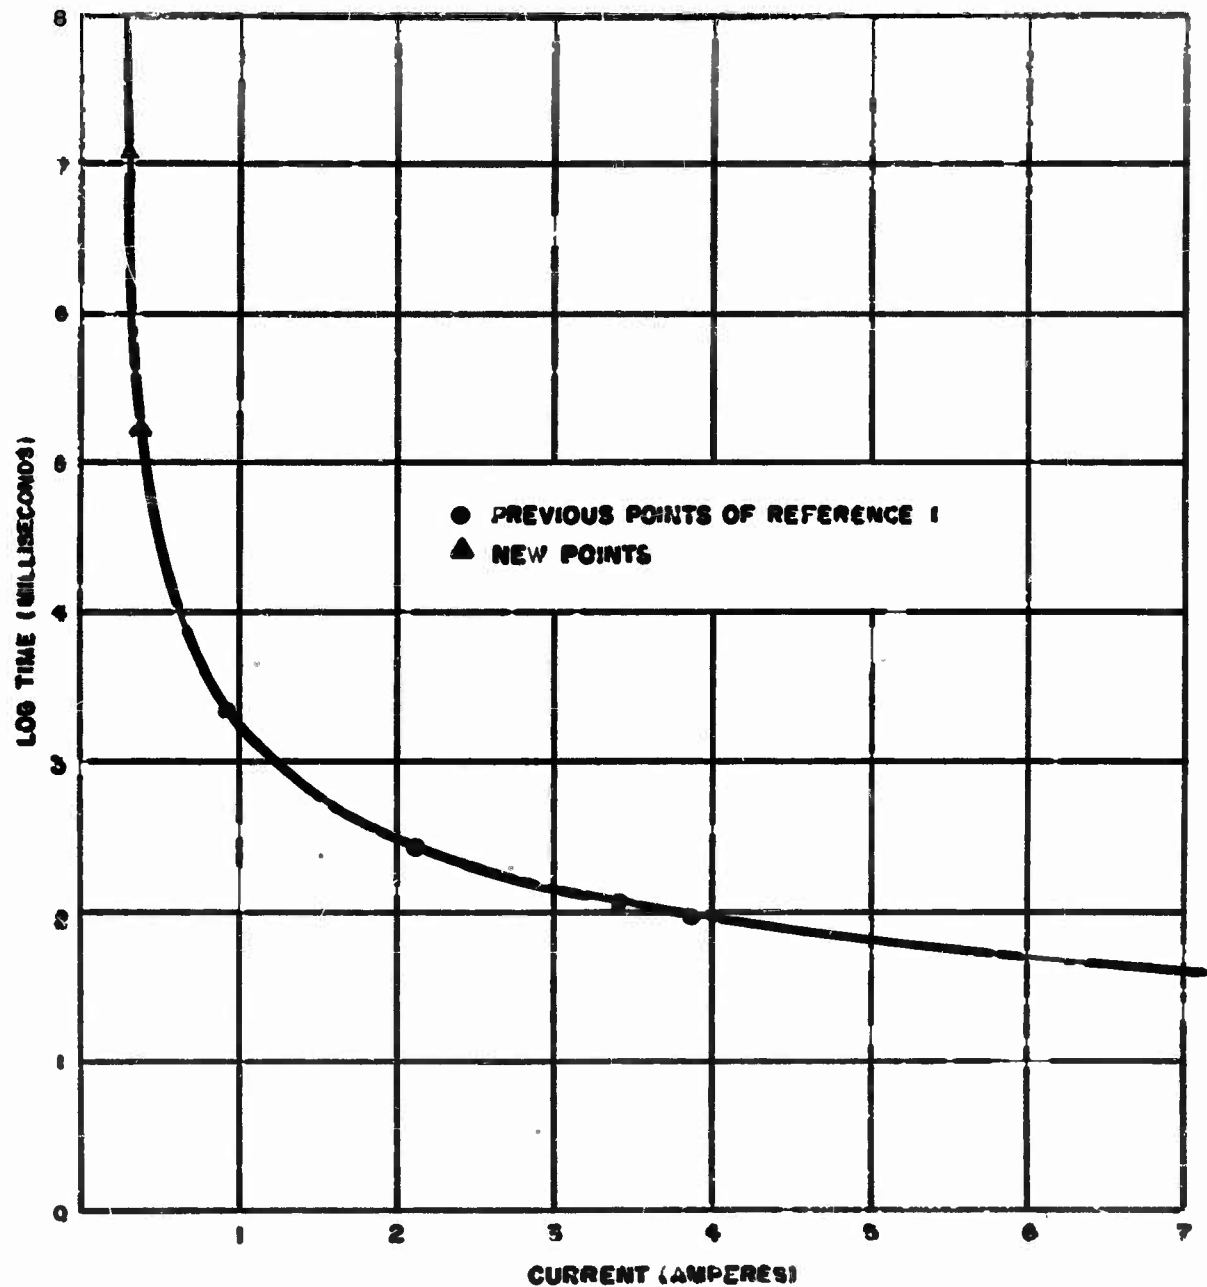


FIG. 5 RESPONSE OF SQUIB MKI MOD 0 TO CONSTANT-CURRENT (RMS) 5-MEGACYCLES PULSE.

## DISTRIBUTION

	Copies
Director of Defense Research & Development Department of Defense Washington 25, D. C.	1
Chief of Naval Operations (OP 611H) Department of Navy Washington 25, D. C.	1
Chief, Bureau of Naval Weapons Department of Navy Washington 25, D. C.	
DIS-32	2
RRRE-8	1
RUME-3	1
RME-32	1
RMP-3	1
RMD-4	1
RREN-312	1
Director Special Projects Office Washington 25, D. C.	
SP-20	1
SP-27	1
Chief, Bureau of Ships Department of Navy Washington 25, D. C. Code 423	2
Chief, Bureau of Yards & Docks Department of Navy Washington 25, D. C. Code D-200	1
Chief of Naval Research Department of Navy Washington 25, D. C. Chemistry Branch	2



## Copies

Commandant  
U. S. Marine Corps  
Washington 25, D. C.

1

Commander  
Operational Development Force  
U. S. Atlantic Fleet  
U. S. Naval Base  
Norfolk 11, Virginia

2

Commander  
U. S. Naval Ordnance Test Station  
China Lake, California  
Code 556  
Code 4572  
Technical Library  
B. A. Breslow  
J. Sherman

1

1

1

2

1

1

Director  
Naval Research Laboratory  
Washington 25, D. C.  
Technical Information Section

2

Director  
David Taylor Model Basin  
Carderock, Maryland  
Dr. A. B. Keil

2

Commander  
Naval Air Development Center  
Johnsville, Pennsylvania  
Aviation Armament Laboratory

1

Commander  
U. S. Naval Weapons Laboratory  
 Dahlgren, Virginia  
Technical Library  
J. Payne (WH Div.)  
L. Frantz  
J. Gray  
P. Altman

2

1

	Copies
<b>Commander</b> <b>U. S. Naval Air Test Center</b> <b>Patuxent River, Maryland</b>	1
<b>Commander</b> <b>Pacific Missile Range</b> <b>Point Mugu, California</b>	1
<b>Commanding Officer</b> <b>U. S. Naval Weapons Station</b> <b>Yorktown, Virginia</b> <b>R &amp; D Division</b>	2
<b>Commanding Officer</b> <b>U. S. Naval Ordnance Laboratory</b> <b>Corona, California</b>	2
<b>Commanding Officer</b> <b>U. S. Naval Propellant Plant</b> <b>Indian Head, Maryland</b> <b>Technical Library</b> <b>WODIC</b>	1 1
<b>Commander</b> <b>Naval Radiological Defense Laboratory</b> <b>San Francisco, California</b>	1
<b>Commander</b> <b>U. S. Naval Weapons Plant</b> <b>Washington 25, D. C.</b>	1
<b>Commanding Officer</b> <b>U. S. Naval Ordnance Plant</b> <b>Macon, Georgia</b>	1
<b>Commanding Officer</b> <b>U. S. Naval Ammunition Depot</b> <b>McAlester, Oklahoma</b> <b>R. E. Halpern</b>	1

Copies

Commanding Officer  
 U. S. Naval Ammunition Depot  
 Waipale Branch  
 Oahu, Hawaii  
 Special Projects Officer  
 Quality Evaluation Laboratory

1

Commanding Officer  
 U. S. Naval Ammunition Depot  
 Navy Number Six Six (66)  
 c/o Fleet Post Office  
 San Francisco, California

1

Commanding Officer  
 U. S. Naval Ammunition Depot  
 Bangor, Maine  
 Quality Evaluation Laboratory

1

Commanding Officer  
 U. S. Naval Ammunition Depot  
 Concord, California  
 Quality Evaluation Laboratory

1

Commanding Officer  
 U. S. Navy Electronics Laboratory  
 San Diego 52, California

1

Commanding Officer  
 U. S. Naval Underwater Ordnance Station  
 Newport, Rhode Island

1

Commanding Officer  
 U. S. Naval Weapons Evaluation Facility  
 Kirtland Air Force Base  
 Albuquerque, New Mexico

1

Superintendent,  
 Naval Post Graduate School  
 Monterey, California

1

Commanding Officer  
 Naval Torpedo Station  
 Keyport, Washington

1

	Copies
Office of Chief of Ordnance	
Department of Army	
Washington 25, D. C.	
ORDGU	1
ORDIN	1
ORDTB	1
 Office of Chief Signal Officer	
Research & Development Division	
Washington 25, D. C.	1
 Office of Chief of Engineers	
Department of Army	
Washington 25, D. C.	
ENGNEB	1
ENGCEB	1
 Commanding General	
Picatinny Arsenal	
Dover, New Jersey	
ORDBB-THB	1
ORDBB-TJ1	1
ORDBB-TK1	1
ORDBB-TM1	1
ORDBB-TP1	1
ORDBB-TP2	1
ORDBB-TP3	1
ORDBB-TR2	1
ORDBB-TS1	1
 Commanding Officer	
Army Signal Research & Development Laboratory	
Fort Monmouth, New Jersey	1
 Commanding Officer	
Office of Ordnance Research	
Duke Station	
Durham, North Carolina	1
 Commander	
U. S. Army Ordnance	
Frankford Arsenal	
Philadelphia 37, Pennsylvania	1

	Copies
<b>Commander</b> <b>U. S. Army Rocket &amp; Guided Missile Agency</b> <b>Redstone Arsenal, Alabama</b>	1
<b>Commanding Officer</b> <b>Diamond Ordnance Fuzo Laboratory</b> <b>Connecticut Avenue &amp; Van Ness St., N. W.</b> <b>Washington 25, D. C.</b> <b>Ordnance Development Laboratory</b> <b>M. Lipnick (Code 005)</b> <b>R. Conyn (Code 710)</b> <b>George Keshm (Code 320)</b>	1 1 1 1
<b>Chief of Staff</b> <b>U. S. Air Force</b> <b>Washington 25, D. C.</b> <b>AFORD-AR</b>	1
<b>Commander</b> <b>Wright Development Center</b> <b>Wright-Patterson Air Force Base</b> <b>Dayton, Ohio</b>	1
<b>Commander</b> <b>Air Material Armament Test Center</b> <b>Elgin Air Force Base, Florida</b>	1
<b>Commander</b> <b>Air Research &amp; Development Command</b> <b>Andrews Air Force Base</b> <b>Washington 25, D. C.</b>	1
<b>Commander</b> <b>Rome Air Development Center</b> <b>Griffiss Air Force Base</b> <b>Rome, New York</b>	1
<b>Commander</b> <b>Holloman Air Development Center</b> <b>Alamogordo, New Mexico</b>	1
<b>Commanding Officer</b> <b>Air Force Missile Test Center</b> <b>Patrick Air Force Base, Florida</b>	1

	Copies
Commander Air Force Cambridge Research Center L. G. Hanscom Field Bedford, Massachusetts	1
Commander COAMA Hill Air Force Base, Utah	1
Armed Services technical Information Agency Arlington Hall Station Arlington, Virginia TIPDR	10
Office of Technical Services Department of Commerce Washington 25, D. C.	100
Director U. S. Bureau of Mines Division of Explosive Technology 4800 Forbes Street Pittsburgh, 13, Pennsylvania	1
Atomic Energy Commission Washington 25, D. C. DMA	1
Lawrence Radiation Laboratory University of California P. O. Box 808 Livermore, California Technical Information Division	1
Director Los Alamos Scientific Laboratory P. O. Box 1663 Los Alamos, New Mexico Library	1
Stavid Engineering Inc. U. S. Route 22 Plainfield, New Jersey	1

	Copies
Vitro Corporation 14000 Georgia Avenue Silver Spring, Maryland	1
Western Cartridge Company Division of Olin Industries East Alton, Illinois	1
Denver Research Institute University of Denver Denver 10, Colorado	1
Universal Match Corporation Ordill, Illinois Mr. Wm. Rose	1
Universal Match Corporation Marion, Illinois	1
Bermite Powder Company Saugus, California	1
Field Command, Defense Atomic Support Agency Albuquerque, New Mexico (attn: FCDR)	1
Defense Atomic Support Agency Washington 25, D. C.	2
Commanding General U. S. Army Proving Ground Aberdeen, Maryland ERL	1
Commanding Officer Engineer Research & Development Laboratory U. S. Army, Fort Belvoir, Virginia	1
Commanding General White Sands Proving Ground White Sands, New Mexico	1

	Copies
Sandia Corporation P. O. Box 5400 Albuquerque, New Mexico	1
Sandia Corporation P. O. Box 969 Livermore, California	1
Lockheed Aircraft Corporation P. O. Box 504 Sunnyvale, California	1
Librascope-Sunnyvale 670 Arques Avenue Sunnyvale, California	1
Director, Applied Physics Laboratory Johns Hopkins University 8621 Georgia Avenue Silver Spring, Maryland Solid Propellents Agency	1
Commanding Officer Fort Dietrick, Maryland	1
Commanding Officer Rock Island Arsenal Rock Island, Illinois	1
Commanding Officer Watertown Arsenal Watertown 72, Massachusetts	1
Commanding General Redstone Arsenal Huntsville, Alabama Technical Library	1
Commander, Ordnance Corps Lake City Arsenal Independence, Missouri Industrial Engineering Division	1



	Copies
Director, USAF Project RAND Via: USAF Liaison Office The RAND Corporation 1700 Main Street Santa Monica, California	1
Aerojet General Corporation Ordnance Division Downy California Dr. L. Zernow	1
Stanford Research Institute Poulter Laboratories Menlo Park, California	1
Explosives Research Group University of Utah Salt Lake City, Utah	1
Beckman Instruments, Inc. 525 Mission Street South Pasadena, California	1
Bulova Research & Development, Inc. 52-10 Woodside Avenue Woodside 77, New York Mel Enneman	1
E. I. duPont deNemours Eastern Laboratories Explosives Department Gibbstown, New Jersey	1
Alleghaney Ballistics Laboratory Cumberland, Maryland	1
The Franklin Institute 20th St. & Benjamin Franklin Parkway Philadelphia, Pennsylvania	1

## Copies

Commanding General  
Headquarters 2DRAADCOM  
Fort George G. Meade, Maryland  
Attn: Radar Officer

1

American Machine & Foundry Co. - Alexandria Division  
1025 North Royal Street  
Alexandria, Virginia  
Attn: Dr. L. F. Dytrt (Contract AF-29(601)-2769)

1

Atlas Powder Company  
Reynolds Ordnance Section  
P. O. Box 271  
Tamaqua, Pennsylvania  
Attn: Mr. R. McGirr

1

Grumman Aircraft Engineering Corporation  
Weapons Systems Department  
Bethpage, Long Island, New York  
Attn: Mr. R. M. Carbee

1

Jansky and Bailey, Inc.  
1339 Wisconsin Avenue, N. W.  
Washington, D. C.  
Attn: Mr. F. T. Mitchell, Jr. (Contract N178-7604)

1

McCormick Selph Associates  
Attn: Technical Librarian  
Hollister, California

1

Midwest Research Institute  
425 Volker Boulevard  
Kansas City, Missouri  
Attn: Security Officer

1

RCA Service Company  
Systems Engineering Facility (Mr. E. B. Johnston)  
Government Service Department  
838 N. Henry Street  
Alexandria, Virginia

1

Redel, Incorporated  
Attn: Library  
2300 E. Katella Avenue  
Anaheim, California

Copies

1

Armed Services Explosives Safety Board  
Department of Defense  
Room 2075, Bldg. T-7, Gravelly Point  
Washington 25, D. C.

1

U. S. Flare Division Atlantic Research Corporation  
19701 W. Goodvale Road  
Saugus, California  
Attn: Mr. Eugene E. Elzufon, Head, R & D Group

1

Welex Electronics Corporation  
Solar Building, Suite 201  
16th and K Streets, N. W.  
Washington 5, D. C.

1

<p>Naval Ordnance Laboratory, White Oak, Md. (NOL technical report 61-24) CHARACTERIZATION OF SQUIB Mk 1 MOD 0: 5- MEGACYCLE RF SENSITIVITY FOR LONG DURATION PULSES (U), by C. Goode and I. Kabik. 24 April 1961. 4p. charts. Projects 506- 925/56015/0704, 506-924/56035/01073 and NOL 443. The response of the Squib Mk 1 mod 0 to 5- megacycle constant current (RMS) has been ex- tended to long input times where the current amplitude for firing reaches a minimum asymp- totic value. For a current amplitude of 374 milliamperes a pulse width of 155 milli- seconds was found necessary to obtain 50- percent fires. When the current was allowed to flow for approximately 10 seconds (essen- tially steady state) a lower firing level of</p> <p>Abstract card is unclassified. (over)</p>	<p>1. Squibs - Mark 1 mod 0 Squibs - Sensitivity Squibs - Firing Title Goode, Charles W. Kabik, Irving, jt. author Project Project Project</p>	<p>1. Squibs - Mark 1 mod 0 Squibs - Sensitivity Squibs - Firing Title Goode, Charles W. Kabik, Irving, jt. author Project Project Project</p>
<p>Naval Ordnance Laboratory, White Oak, Md. (NOL technical report 61-24) CHARACTERIZATION OF SQUIB Mk 1 MOD 0: 5- MEGACYCLE RF SENSITIVITY FOR LONG DURATION PULSES (U), by C. Goode and I. Kabik. 24 April 1961. 4p. charts. Projects 506- 925/56015/0704, 506-924/56035/01073 and NOL 443. The response of the Squib Mk 1 mod 0 to 5- megacycle constant current (RMS) has been ex- tended to long input times where the current amplitude for firing reaches a minimum asymp- totic value. For a current amplitude of 374 milliamperes a pulse width of 155 milli- seconds was found necessary to obtain 50- percent fires. When the current was allowed to flow for approximately 10 seconds (essen- tially steady state) a lower firing level of</p> <p>Abstract card is unclassified. (over)</p>	<p>1. Squibs - Mark 1 mod 0 Squibs - Sensitivity Squibs - Firing Title Goode, Charles W. Kabik, Irving, jt. author Project Project Project</p>	<p>1. Squibs - Mark 1 mod 0 Squibs - Sensitivity Squibs - Firing Title Goode, Charles W. Kabik, Irving, jt. author Project Project Project</p>
<p>Naval Ordnance Laboratory, White Oak, Md. (NOL technical report 61-24) CHARACTERIZATION OF SQUIB Mk 1 MOD 0: 5- MEGACYCLE RF SENSITIVITY FOR LONG DURATION PULSES (U), by C. Goode and I. Kabik. 24 April 1961. 4p. charts. Projects 506- 925/56015/0704, 506-924/56035/01073 and NOL 443. The response of the Squib Mk 1 mod 0 to 5- megacycle constant current (RMS) has been ex- tended to long input times where the current amplitude for firing reaches a minimum asymp- totic value. For a current amplitude of 374 milliamperes a pulse width of 155 milli- seconds was found necessary to obtain 50- percent fires. When the current was allowed to flow for approximately 10 seconds (essen- tially steady state) a lower firing level of</p> <p>Abstract card is unclassified. (over)</p>	<p>1. Squibs - Mark 1 mod 0 Squibs - Sensitivity Squibs - Firing Title Goode, Charles W. Kabik, Irving, jt. author Project Project Project</p>	<p>1. Squibs - Mark 1 mod 0 Squibs - Sensitivity Squibs - Firing Title Goode, Charles W. Kabik, Irving, jt. author Project Project Project</p>
<p>Naval Ordnance Laboratory, White Oak, Md. (NOL technical report 61-24) CHARACTERIZATION OF SQUIB Mk 1 MOD 0: 5- MEGACYCLE RF SENSITIVITY FOR LONG DURATION PULSES (U), by C. Goode and I. Kabik. 24 April 1961. 4p. charts. Projects 506- 925/56015/0704, 506-924/56035/01073 and NOL 443. The response of the Squib Mk 1 mod 0 to 5- megacycle constant current (RMS) has been ex- tended to long input times where the current amplitude for firing reaches a minimum asymp- totic value. For a current amplitude of 374 milliamperes a pulse width of 155 milli- seconds was found necessary to obtain 50- percent fires. When the current was allowed to flow for approximately 10 seconds (essen- tially steady state) a lower firing level of</p> <p>Abstract card is unclassified. (over)</p>	<p>1. Squibs - Mark 1 mod 0 Squibs - Sensitivity Squibs - Firing Title Goode, Charles W. Kabik, Irving, jt. author Project Project Project</p>	<p>1. Squibs - Mark 1 mod 0 Squibs - Sensitivity Squibs - Firing Title Goode, Charles W. Kabik, Irving, jt. author Project Project Project</p>

308 milliamperes for 50-percent response was determined. These values are consistent with previous data obtained at 5 megacycles for shorter pulse times and also with DC constant current firing data.

Abstract card is unclassified

308 milliamperes for 50-percent response was determined. These values are consistent with previous data obtained at 5 megacycles for shorter pulse times and also with DC constant current firing data.

Abstract card is unclassified

308 milliamperes for 50-percent response was determined. These values are consistent with previous data obtained at 5 megacycles for shorter pulse times and also with DC constant current firing data.

Abstract card is unclassified

308 milliamperes for 50-percent response was determined. These values are consistent with previous data obtained at 5 megacycles for shorter pulse times and also with DC constant current firing data.

Abstract card is unclassified

Naval Ordnance Laboratory, White Oak, Md.  
(NOL technical report 61-24)

CHARACTERIZATION OF SQUIB MK 1 MOD 0: 5-  
MEGACYCLE RF SENSITIVITY FOR LONG DURATION  
PULSES (U), by C. Goode and I. Kabik. 24  
April 1961. 4p. charts. Projects 506-  
925/56015/0704, 506-924/56035/01073 and  
NOL 443.

The response of the Squib Mk 1 mod 0 to 5-  
megacycle constant current (RMS) has been ex-  
tended to long input times where the current  
amplitude for firing reaches a minimum asymp-  
totic value. For a current amplitude of 374  
milliamperes a pulse width of 155 milli-  
seconds was found necessary to obtain 50-  
percent fires. When the current was allowed  
to flow for approximately 10 seconds (essen-  
tially steady state) a lower firing level of

Abstract card is unclassified.

(over)

1. Squibs -  
Mark 1 mod 0

2. Squibs -  
Sensitivity

3. Squibs -  
Firing

I. Title  
II. Goode,

Charles W.

III. Kabik, Irving,  
jt. author

IV. Project

V. Project

VI. Project

Naval Ordnance Laboratory, White Oak, Md.  
(NOL technical report 61-24)

CHARACTERIZATION OF SQUIB MK 1 MOD 0: 5-  
MEGACYCLE RF SENSITIVITY FOR LONG DURATION  
PULSES (U), by C. Goode and I. Kabik. 24  
April 1961. 4p. charts. Projects 506-  
925/56015/0704, 506-924/56035/01073 and  
NOL 443.

The response of the Squib Mk 1 mod 0 to 5-  
megacycle constant current (RMS) has been ex-  
tended to long input times where the current  
amplitude for firing reaches a minimum asymp-  
totic value. For a current amplitude of 374  
milliamperes a pulse width of 155 milli-  
seconds was found necessary to obtain 50-  
percent fires. When the current was allowed  
to flow for approximately 10 seconds (essen-  
tially steady state) a lower firing level of

Abstract card is unclassified.

(over)

Naval Ordnance Laboratory, White Oak, Md.  
(NOL technical report 61-24)

CHARACTERIZATION OF SQUIB MK 1 MOD 0: 5-  
MEGACYCLE RF SENSITIVITY FOR LONG DURATION  
PULSES (U), by C. Goode and I. Kabik. 24  
April 1961. 4p. charts. Projects 506-  
925/56015/0704, 506-924/56035/01073 and  
NOL 443.

The response of the Squib Mk 1 mod 0 to 5-  
megacycle constant current (RMS) has been ex-  
tended to long input times where the current  
amplitude for firing reaches a minimum asymp-  
totic value. For a current amplitude of 374  
milliamperes a pulse width of 155 milli-  
seconds was found necessary to obtain 50-  
percent fires. When the current was allowed  
to flow for approximately 10 seconds (essen-  
tially steady state) a lower firing level of

Abstract card is unclassified.

(over)

1. Squibs -  
Mark 1 mod 0

2. Squibs -  
Sensitivity

3. Squibs -  
Firing

I. Title  
II. Goode,

Charles W.

III. Kabik, Irving,  
jt. author

IV. Project

V. Project

VI. Project

Naval Ordnance Laboratory, White Oak, Md.  
(NOL technical report 61-24)

CHARACTERIZATION OF SQUIB MK 1 MOD 0: 5-  
MEGACYCLE RF SENSITIVITY FOR LONG DURATION  
PULSES (U), by C. Goode and I. Kabik. 24  
April 1961. 4p. charts. Projects 506-  
925/56015/0704, 506-924/56035/01073 and  
NOL 443.

The response of the Squib Mk 1 mod 0 to 5-  
megacycle constant current (RMS) has been ex-  
tended to long input times where the current  
amplitude for firing reaches a minimum asymp-  
totic value. For a current amplitude of 374  
milliamperes a pulse width of 155 milli-  
seconds was found necessary to obtain 50-  
percent fires. When the current was allowed  
to flow for approximately 10 seconds (essen-  
tially steady state) a lower firing level of

Abstract card is unclassified.

(over)

1. Squibs -  
Mark 1 mod 0

2. Squibs -  
Sensitivity

3. Squibs -  
Firing

I. Title  
II. Goode,

Charles W.

III. Kabik, Irving,  
jt. author

IV. Project

V. Project

VI. Project

308 milliamperes for 50-percent response was determined. These values are consistent with previous data obtained at 5 megacycles for shorter pulse times and also with DC constant current firing data.

---

Abstract card is unclassified

308 milliamperes for 50-percent response was determined. These values are consistent with previous data obtained at 5 megacycles for shorter pulse times and also with DC constant current firing data.

---

Abstract card is unclassified

308 milliamperes for 50-percent response was determined. These values are consistent with previous data obtained at 5 megacycles for shorter pulse times and also with DC constant current firing data.

---

Abstract card is unclassified

308 milliamperes for 50-percent response was determined. These values are consistent with previous data obtained at 5 megacycles for shorter pulse times and also with DC constant current firing data.

---

Abstract card is unclassified